



证券代码：
600894

怡达快速电梯有限公司

地址:浙江省湖州市南浔经济开发区联谊西路88号
邮编:313009
电话:0572-3062222
邮箱:yd@ydelevator.com

YIDA EXPRESS ELEVATOR CO.,LTD

ADD: No. 88 West Lian Yi Road, Nanxun EDZ,
Huzhou City, Zhejiang Province, China
Postcode:313009
Tel :+86 0572 3062226
E-mail:yd@ydelevator.com



遍布全国的销售服务网络
详细联系方式请登录 www.ydepss.com



中国区服务热线：
400 887 6336

本书为一般信息类出版物，我们保留随时更改产品设计和说明的权利。本书的任何字句，无论其字面意思或含义，对于任何产品及产品的用途和质量，或者任何购销合同条文的表述与更改均不承担任何责任。

General information for book publication, we reserve the right to change product design and illustration. Any words of this book, regardless of its literal meaning or meanings, for any purpose and quality product and the product, or any expression and changes of purchase and sale contract provisions shall not bear any responsibility.

EPSS-2023-A版



EF10 \ ER10

扶梯、人行道系列

Escalator
Moving walk Series

智享 未来
Touch the future



国家高新技术企业
国家CNAS认可检测中心
国家火炬计划产业化示范项目承担企业
国家级两化融合管理体系贯标试点企业
国家知识产权优势企业
国家级绿色工厂
浙江省工业旅游示范基地

National High-Tech Enterprise
National CNAS Accredited Testing Center
National Torch Plan Industrialization Demonstration Project Undertaking Enterprise
Pilot Enterprise of National-level informatization and industrialization integrated management system
National intellectual property advantage enterprise
National green factory
Zhejiang Industrial Tourism Demonstration Base



了解更多公司信息
More about EPSS




EPSS

怡达快速电梯有限公司是广州工控集团下属上市企业广日股份(证券代码:600894)旗下的公司,是广日股份实施双品牌独立运作模式的重要成员。公司成立于1996年,是一家集电梯研发、设计、制造、销售、安装、维保为一体的整梯制造企业和楼宇交通解决专家,也是国内较早取得电梯A级制造许可证的企业之一。公司产品涵盖乘客电梯、载货电梯、医用电梯、观光电梯、自动扶梯/人行道、家用电梯(别墅梯)等十多个系列。公司不仅服务国内市场,还出口至全球70多个国家和地区,品质和服务享誉全球。

Yida Express Elevator Co.,LTD is a subsidiary of Guangzhou Industrial Control Group's listed company, Guangri Co.,LTD. (stock code:600894). It is an important member of Guangri Co.,LTD in implementing a dual brand independent operation mode. Established in 1996, Yida is a complete elevator manufacturing enterprise and building traffic solution expert integrating elevator research and development, design, manufacturing, sales, installation and maintenance. It is also one of the earliest enterprises in China that obtain production license of A class. The company's products cover more than ten series, including passenger elevators, freight elevators, hospital elevators, observation elevators, escalators/moving walks and home elevators. The company not only serves the domestic market but also exports to more than 70 countries and districts around the world, with quality and service renowned worldwide.



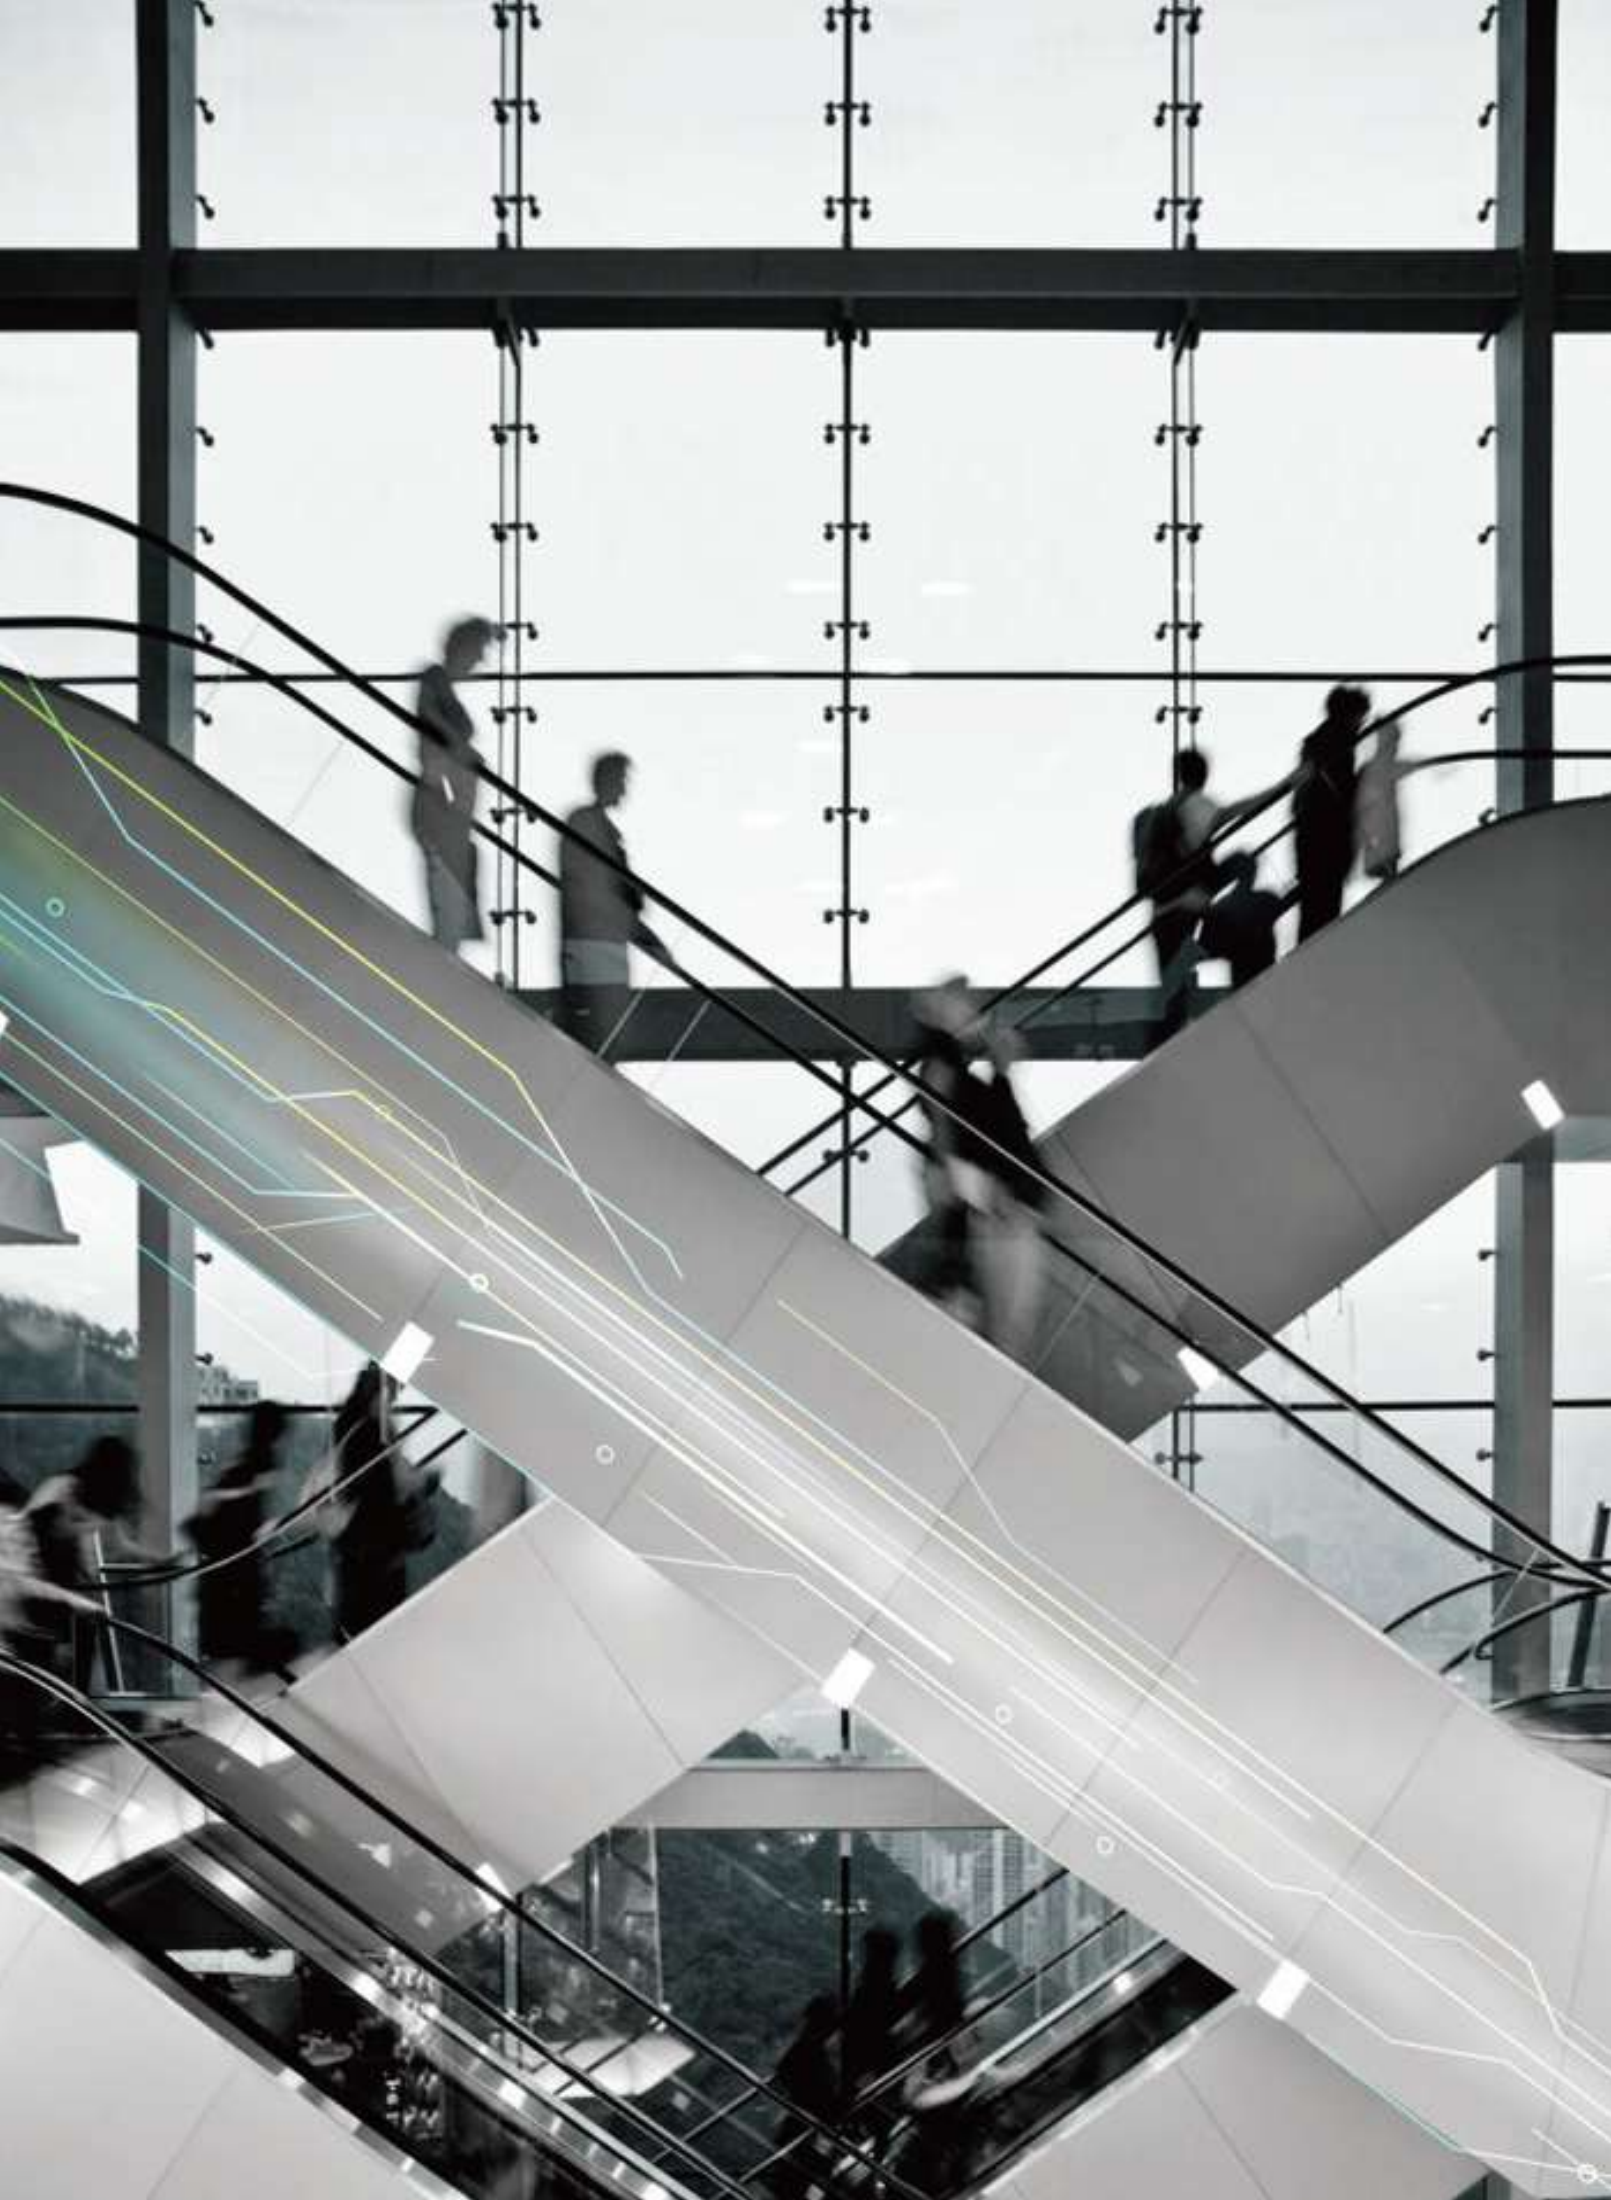

Instantly experience the riding
with safe and green

即刻体验 绿色安全的乘享

每天，
全球有 70 多个国家和地区，
享受到 EPSS 带来的
安全、智慧、安静、绿色的乘梯体验。

EPSS 面向商业中心、交通枢纽等公共空间研发的具有先进智能控制系统的扶梯、人行道系列。专注安全和节能；高集成智能控制系统，时刻保障安全、精确、高效的驱动；先进设计，选材优良，为乘客提供安全、高效、舒适的乘梯体验。

Every day,
more than 70 countries and regions around
the world, enjoy the experience with
security, intelligence,
quiet and green brought by EPSS.

EPSS escalators and sidewalks with advanced intelligent control system developed for commercial center, transportation hub and other public spaces, focusing on security and green. Higher building space utilization to save more construction cost. Intellectual control system, provide safe, accurate and efficient driving all the time. Advanced design and excellent material selection provide safe, efficient and comfortable ride experience for passengers.


Leading Technology 领先技术



智能系统 Intelligent system

先进的多微机控制系统, 直观的故障数码显示, 完备的安全装置, 确保运行安全可靠。对电梯运行实施最安全、精确、高效的管理控制。


Advanced Multi-microprocessor control system, intuition-ist fault digital display, full safe device to make sure its running safe and reliable.



工艺精细 Sophisticated technology

应用工艺精细的整体不锈钢梯级, 特殊表面处理工艺, 齿顶磨光、防滑处理, 具有美观、易维保、质地坚硬、防氧化、防锈等特点。


Use the best stainless steel steps with special surface disposal techniques, polishing, anti-slip disposal with the characters of nice appearance, easy maintenance, hard material, and anti-oxidation, antirust.



结构紧凑 Compact structure

鱼腹梁式短踏板大大缩小了空间跨度, 使整机结构更为紧凑, 可灵活适应建筑格局, 为客户节省宝贵的建筑空间。


Fish-beam padal shorten the space to make the structure more compact and it can adapt the constructionsituation, it can save more space for customers.



经久耐用 Durable

采用重量轻、强度高的金属桁架, 保证产品的整体刚性; 自动润滑系统, 可保证产品及时自动为部件加油, 提高产品的使用寿命。

It adopts light, strong metal supports to guarantee its whole rigidity; auto-lubrication system can make sure the escalator can oil the parts automatically in time and prolong its service life.



舒适性好 Comfortable


采用先进的控制系统及减速器, 优质的驱动链条和精密的安装工艺, 保证产品的运行舒适性。

带靠边的梯路轨道设计, 使整个梯路固定在轨道内运行, 控制了梯路的游动, 避免了踏板与围裙板、梳齿发生摩擦, 方便了安装调试和维保, 提高了运行效果。

Use advanced control system and retarder, good drive chain and installation techniques to guarantee the running comfort. The design of step guide rail makes all the steps run in a fixed rout. It controls the movability and avoids the friction amid the step, shirt panel and the comb. It brings the greater convenience to the installation, debugging, repair and maintenance. It improves the running performance.

Standard Function

标准功能



双向运行

Double direction running

操作上下进出口处钥匙开关可实现扶梯(人行道)上行或下行。

The operation of the key switch in the upper and lower inlet and outlet can make the escalator/moving walk running.



紧急停止

Emergency stop

按下上下进出口处的急停按钮,可使扶梯(人行道)停止运行。

Pressing the emergency stop button in the upper and lower inlet and outlet can stop the escalator/moving walk running.



检修运行

Inspection running

将检修盒接入上下机房控制箱内的检修插座内,即可进行检修点动运行。

Connect the maintenance box with the maintenance sockets in a controlling box located at either end of the escalator to realize inching operation for maintenance.



安全装置

Safety device

具备国家标准GB16899和欧洲标准EN115所要求的全部安全保护功能。

There is safety protection function required in the nation standard GB16899 and the European norm EN115.




扶手入口

Handrail inlet

新颖别致、富有现代时尚感的流线型扶手带出入口设计,赋予扶梯更大的灵性和亲和力。

Novel,trendy and attractive design for the entrance and exit of the handrail belt makes the escalators more live and amicable.



围裙板刷

Skirt panel brush

安装于围裙板两侧位于梯级上面的围裙板刷以避免乘客的鞋子碰撞围裙板和能安全有效地防止异物被带入梯级。

The skirt panel brush installed in the both sides of the skirt panel and the above of the step is to prevent the passengers' shoes crashing with the skirt panel. It can avoid something entering into the step safely and effectively.



运行与故障显示

Moving directions and failure display

通过观察安装于扶梯(人行道)上端进出口围裙板左侧数显板上的数码指示,可使维修工作变得更快捷与轻松。

By means of observing the digital readings on the displaying plates mounted on both sides of the skirts board at the entrance and exit of the escalator (or moving walks),the maintenance work can be made promptly and easily.



立式曳引机

Vertical type traction machine

具有平滑的啮合和摩擦减少,确保特别低的噪音,能减少噪音60%以上,与传统的蜗轮驱动相比有更大的驱动效率。

It has the smooth engagement and the frictional reduction.It guarantees the extremely low noise.It can reduce more than 60% of the noise.Compared with the traditional worm wheel drive,it has the higher driving efficiency.



滚轮内置梯级链

Inbuilt step chain-roller

滚轮内置于专门设计的滚轴梯级链,能有效实现降低驱动运行时的噪音,使运行更加平稳和宁静。

The roller is internally installed in the specially-designed roller step chain.It can effectively fulfill the reduction of the noise during the driving process and bring about a more smooth and quiet running.



梯级间隙照明

Step illumination

绿色荧光柔和地从上/下端部相邻两节梯级(踏板)的啮合齿口中照射出,以提醒乘客注意梯级进出水平段,提高乘梯安全。

Green light softly beams out from the space between the engaged teeth of the two neighboring steps to remind the passengers to be aware of the level sections both at the entrance and exit,resulting in increased security for the passengers.



Optional Function 选配功能

围裙照明

Skirt panel illumination

沿着梯级运行轨迹流线型的围裙板照明光线, 在运行时不仅维持了光束的美观大方, 同时又强调了扶梯在整幢大楼中的可见度并使乘客的乘坐更加舒心和安全。

The skirt panel lighting along the step running track keep the elegant and beauty of the light during the running, and the visibility of the escalator in the whole building is emphasized, which bring more safety feeling to the passengers who are taking the escalator.

梳齿照明

Comb illumination

安装在梳齿板两侧围裙板上, 以提醒乘客注意梯级进出梳齿位置, 提高乘客安全。

The comb illumination installed in the both sides of the skirt panels is to warn the passengers to take care of the steps,which brings much more safety.

扶手照明

Handrail illumination

扶手照明安装在扶手支架内, 柔和的光线为运行中的自动扶梯增添了几份灵气。

The handrail illumination is installed in the handrail support.The gentle light adds charm to the running escalator.

加热装置

Heating device

对于寒冷地区室外扶梯, 为了防止结冰造成扶梯部件的损伤, 选用加热装置对扶手带, 梯级, 主机, 梳齿板等进行防护措施。

For the outer door escalator installed in the cold area,in order to prevent freezing which can damage the escalator components.Using heating device can protect handrail,steps,machine,comb panel and so on.

运行方向指示

Running direction indication

运行方向和禁行显示标识置于扶手带出入口处, 以显而易见的运行或禁行指示, 确保乘客安全自如地乘坐。

The running direction and forbidden display mark have been placed in the inlet and outlet of the handrail obviously, reminding the passenger to take the escalator safely.

自动启动/停止

Automatic start/stop

位于出入口前沿踏板两侧的红外线传感装置可实时检测到进入该区域的乘客, 并通讯控制微机自动使扶梯(人行道)运行; 当所有乘客离开后会自动停梯, 达到最佳节能效果。

The infrared ray sensor which is near the floor earth can detect the passengers who enter the floor and start running. After the passengers left the escalator, it will stop running to save energy.

VVVF变频控制系统

VVF energy-saving system

选用变频器后, 能有效的降低能源消耗, 在人流稀少的场合通常能节能60%, 并能有效减少峰值电流80%。在空载情况下, 自动扶梯以低速运行, 当检测到乘客接近时即恢复正常运行。

The use of the inverter can reduce the energy consumption effectively. It can usually save energy up to 60% and decrease the peak current up to 80% in the occasion that there is not too much people. When it is no-load, the escalator will operate at a low speed. And it will run immediately at normal speed when it detects that there is propel approaching.

节能运行模式

Energy conservation
running mode

可采用变频控制或自启动方式实现节能。

It can adopt VVF control or auto-starting mode to save energy.

扶手带颜色
Handrail color



黑色(标配)
Black (standard)



浅绿
Light green



红
Red

护壁板颜色
Wainscot color



无色透明(标配)
Colorless and
transparent
(standard)



灰色
Gray



古铜色
Bronze



Safety Devices

安全装置

- 1 断、错相保护：
- 2 短路保护：
- 3 过载保护：
- 4 静电保护：
- 5 急停保护：
- 6 梳齿安全保护：
- 7 扶手入口保护：
- 8 驱动链断裂保护：
- 9 围裙保护：
- 10 梯级(踏板)链保护：
- 11 梯级(踏板)下陷保护：
- 12 手动盘车装置检测保护：
- 13 检修盖板或楼层板打开保护：
- 14 超、欠速保护：
- 15 非操纵逆转保护：
- 16 梯级(踏板)缺失保护：
- 17 扶手带速度偏离保护：
- 18 抱闸释放检测保护：
- 19 制停距离超距保护：
- 20 围裙板防夹装置(裙板毛刷)：

- 1 Phase failure protection
- 2 Short circuit protection
- 3 Over-load protection
- 4 Static electricity protection
- 5 Emergency stop button
- 6 Comb safety guard
- 7 Handrail entry safety protection
- 8 Main drive chains safety protection
- 9 Skirting guard
- 10 Step(pallet)chains safety Protection
- 11 Step(pallet)agging Protection
- 12 Manual barring device detection and protection
- 13 Inspection cover plate or floor plate open protection
- 14 Over/Under speed protection
- 15 Unintentional reversal protection
- 16 Step(pallet) deficiency protection
- 17 Handrail speed deviation protection
- 18 Brake release detection and protection
- 19 Stopping distance of super distance protection
- 20 Skirt panel anti clamping device (Skirt panel brush)


- 当动力电源缺相或错相时保护。
- 当电力回路短路时保护。
- 当电机持续过载时保护。
- 消除梯级(踏板)及扶手带等部件在运行中产生的静电。
- 当需要紧急停梯时,按下急停开关起保护。
- 当异物夹入梳子齿时保护。
- 当扶手入口有异物夹住时起保护。
- 当驱动链断裂或过长时起保护。
- 当异物夹入梯级(踏板)与围裙板之间起保护。
- 当梯级(踏板)链断裂或过长时保护。
- 当梯级(踏板)损坏而下陷时保护。
- 当装上可拆卸的手动盘车装置时保护；
- 在正常运行条件下,当检修盖板或楼层板打开时保护；
- 当自动扶梯/自动人行道速度超过或低于名义速度的1.2倍时起作用。
- 当梯级、踏板或胶带改变规定运行方向时起保护
- 在正常运行条件下,当检测到梯级或踏板缺失时保护；
- 在正常运行条件下,当扶手带运行速度偏离梯级、踏板或胶带的实际速度大于-15%且持续时间大于15秒时保护；
- 自动扶梯或自动人行道启动后,如果检测到抱闸没有释放则保护；
- 停梯时超出最大允许制停距离1.2倍时保护；
- 为降低梯级与围裙板之间的滞阻的可能性和防夹而设置的保护装置。

- Protection against risk of phase failure
- Protection against risk of short circuit
- Protection against risk of motor continually over load
- Eliminate static electricity raised from running of the steps(pallets)
- Push the emergency stop button to stop the escalator(moving walk) against emergency raise
- Protection against risk of foreing bodies being trapped at the point where the step enter the step(pallet)enters the comb
- protection against risk of foreign bodies being jammed into handrail entry
- Protection against risk of drive chains being breakage or undue elongation
- Protection against risk of foreign bodies being jammed into clearance between steps(pallets)and skirting
- Protection against risk of step(pallet)chains being breakaga or undue elongation
- Protection against risk of steps being breakaga and sagging
- Protection against risk of fitted with removable manual barring device detection
- In normal running conditions, Protection against risk of inspection cover plate or floor plate open
- Protection against risk of speed being over/less than 1.2double of rated speed
- Protection against risk of unintentional reversal of the direction of travel
- In normal running conditions, Protection against risk of detection Step or pallet deficiency
- In normal running conditions, Protection against risk of handrail speed deviation steps, pallets or tape actual speed is greater than 15% and continue time than 15 seconds
- Start the escalator or moving walk after, if detection brake not release protection
- Protection against risk of beyond of the maximum allowable braking distance 1.2 double to stopthe ladder
- To reduce the possibility of hysteresis resistance between the steps and skirt panel clamping prevention of the protection device



Layout
Plan

布置方案

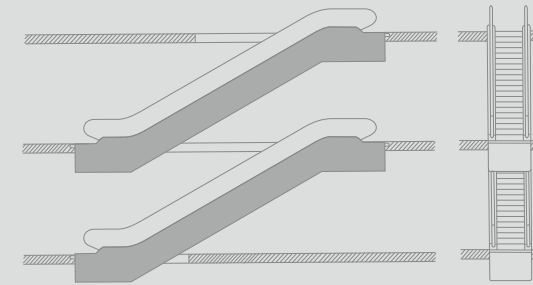


断续布置的扶梯(用于单向交通)

适用于较小型商场中三个楼层之间的运行。

Interrupted arrangement Layout (one-way type)

Suitable for small-sized shopping malls with three floors.

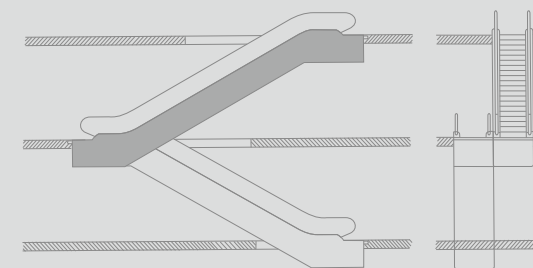


连续布置(用于单向交通)

连续式配置的自动扶梯或人行道,把若干层楼连接起来。它比断续需要更多的空间。

Continuous layout (one-way traffic)

Continuous layout type escalator and moving walk can connect several floors, but they need more space than the inconsistent layout.

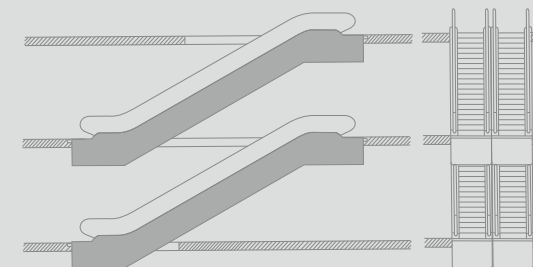


平行布置(用于双向交通)

这种分置对顾客来说,有些不大方便,但对商场主来说却很优越性,因为您可以在顾客换乘扶梯的路上向他们提供一些特殊的服务。

Parallel layout (two-way type)

The layout of this type may cause slight inconvenience to shoppers, but advantageous for shopping mall owners since they can marker certain products and services to shoppers on their way to change escalators.

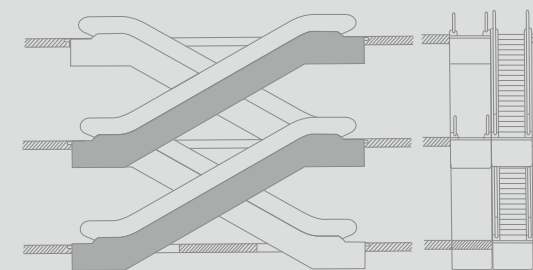

交叉连续布置(用于双向交通)


安装在多楼层中的交叉连续布置的扶梯,可以服务于两个运行方向,这种形式多用于商场,现在也越来越多地用在政府机关和公共场所,它可以减小主楼层之间的运行时间。

Crisscross,continuous arrangement (two-way type)


Installed in buildings with multiple floors, the crisscross layout can travel in two directions to limit the traveling time between floors. This type is widely used in shopping malls and now being used more and more in government institutes and public places.

Construction Parameters

土建参数

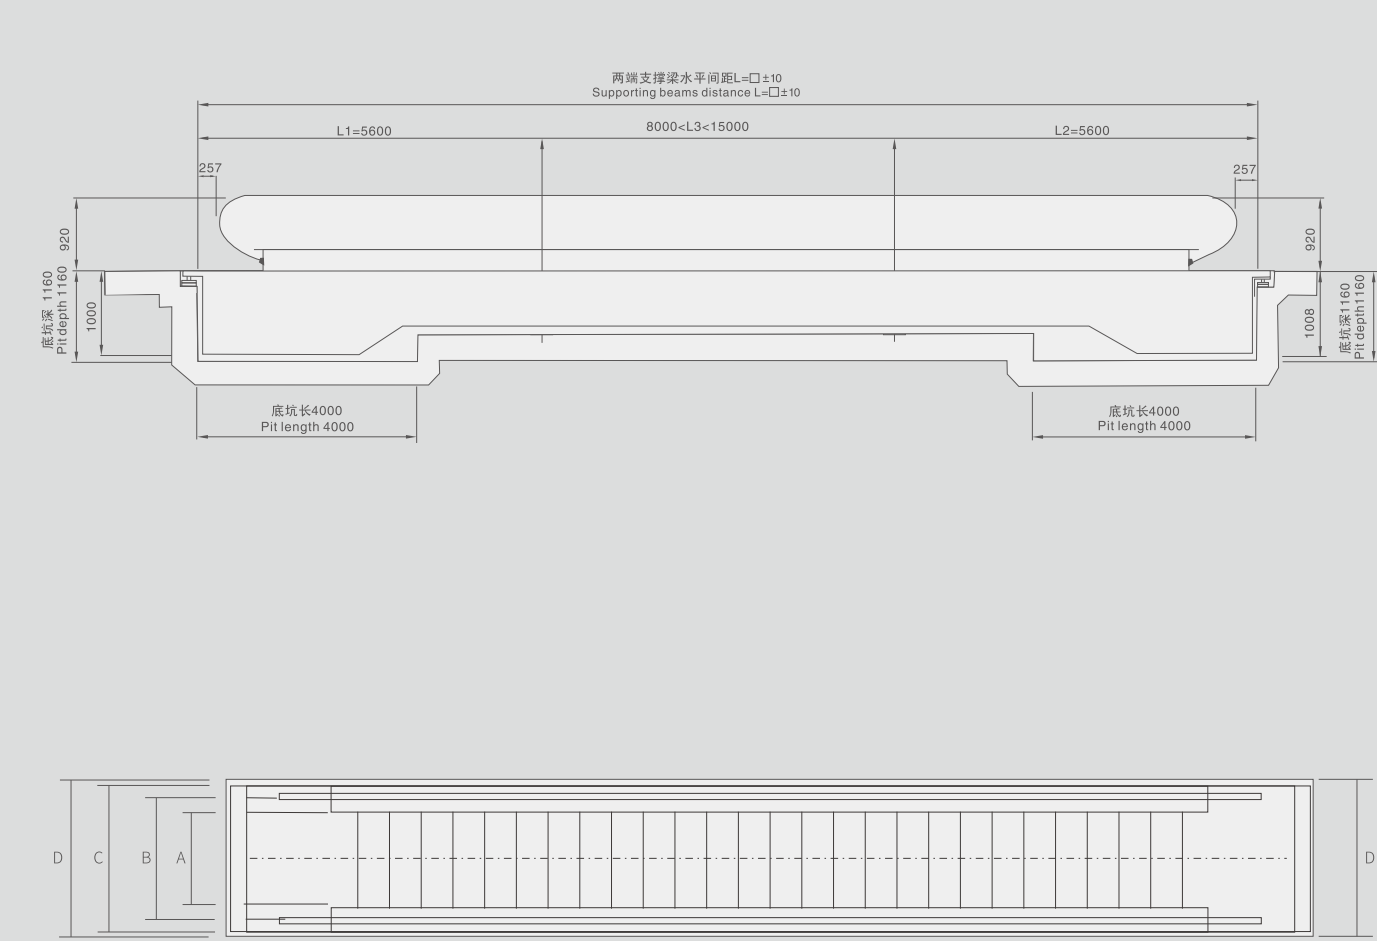

土建示意图仅供参考
The schematic drawing of civil work is for reference only

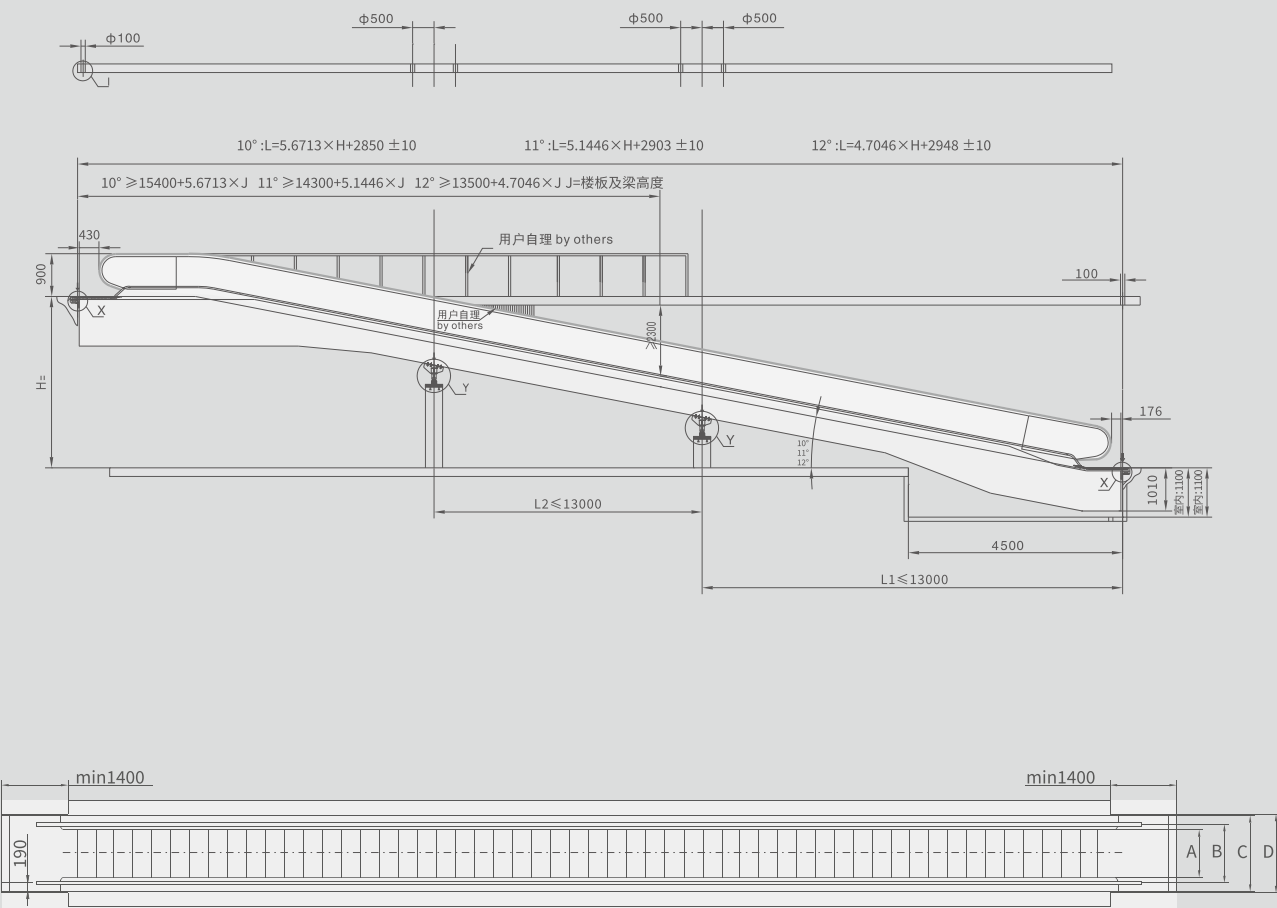

土建示意图仅供参考
The schematic drawing of civil work is for reference only

Horizontal moving walk
水平人行道

型号 Model	使用区段长度L(mm) The length of use area	额定速度(m/s) Rated speed	最大输送能力(人/h) Max load capacity	倾斜角(°) Inclination	驱动主机功率(KW) Motor power	A(mm)	B(mm)	C(mm)	D(mm)
ER10 YRMS0-80	L≤16000	0.5/0.65	4800/5900	0	5.5	800	1038	1400	≥1460
	16000<L≤30000				7.5				
	30000<L≤70000				11				
	70000<L≤100000				15				
	L≤16000				5.5				
ER10 YRMS0-100	16000<L≤30000	0.5/0.65	6000/7300	0	7.5	1000	1238	1600	≥1660
	30000<L≤70000				11				
	70000<L≤100000				15				
	L≤16000				5.5				
	16000<L≤30000				7.5				

注：如若超出以上规格范围，请与公司销售中心联系
Remark: Please contact with Sales department if it exceeds above specification


12° moving walk
12°人行道

型号 Model	提升高度H(mm) Traveling height	额定速度(m/s) Rated speed	最大输送能力(人/h) Max load capacity	倾斜角(°) Inclination	驱动主机功率(KW) Motor power	A(mm)	B(mm)	C(mm)	D(mm)
ER10 YRMS12-80	1350≤H≤3000	0.5	4800	12	5.5	800	1038	1400	1460
	3000<H≤4500				7.5				
	4500<H≤5500				9				
	5500<H≤7000				11				
	7000<H≤8000				13				
ER10 YRML12-80	8000<H≤9000	0.5	6000	12	2×11	1000	1238	1600	1660
	1350≤H≤2500				5.5				
	2500<H≤3500				7.5				
	3500<H≤4500				9				
	4500<H≤5500				11				
ER10 YRMS12-100	5500<H≤6000	0.5	6000	12	13	1000	1238	1600	1660
	6000<H≤7000				15				
	7000<H≤9000				2×11				
ER10 YRML12-100	1350≤H≤2500	0.5	6000	12	5.5	1000	1238	1600	1660
	2500<H≤3500				7.5				
	3500<H≤4500				9				
	4500<H≤5500				11				
	5500<H≤6000				13				


注：如若超出以上规格范围，请与公司销售中心联系
Remark: Please contact with Sales department if it exceeds above specification

Construction Parameters

土建参数

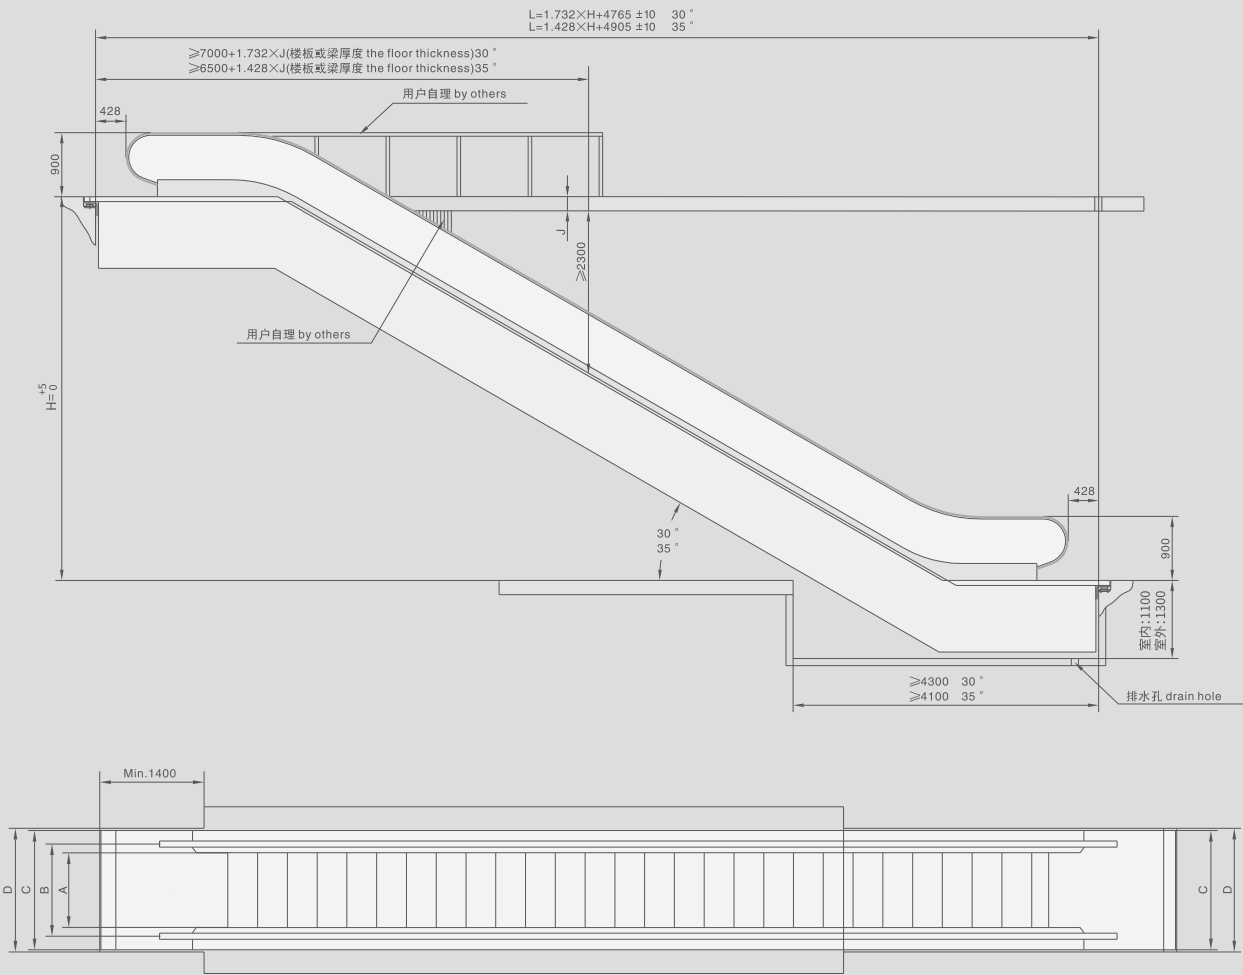

土建示意图仅供参考
The schematic drawing of civil work is for reference only

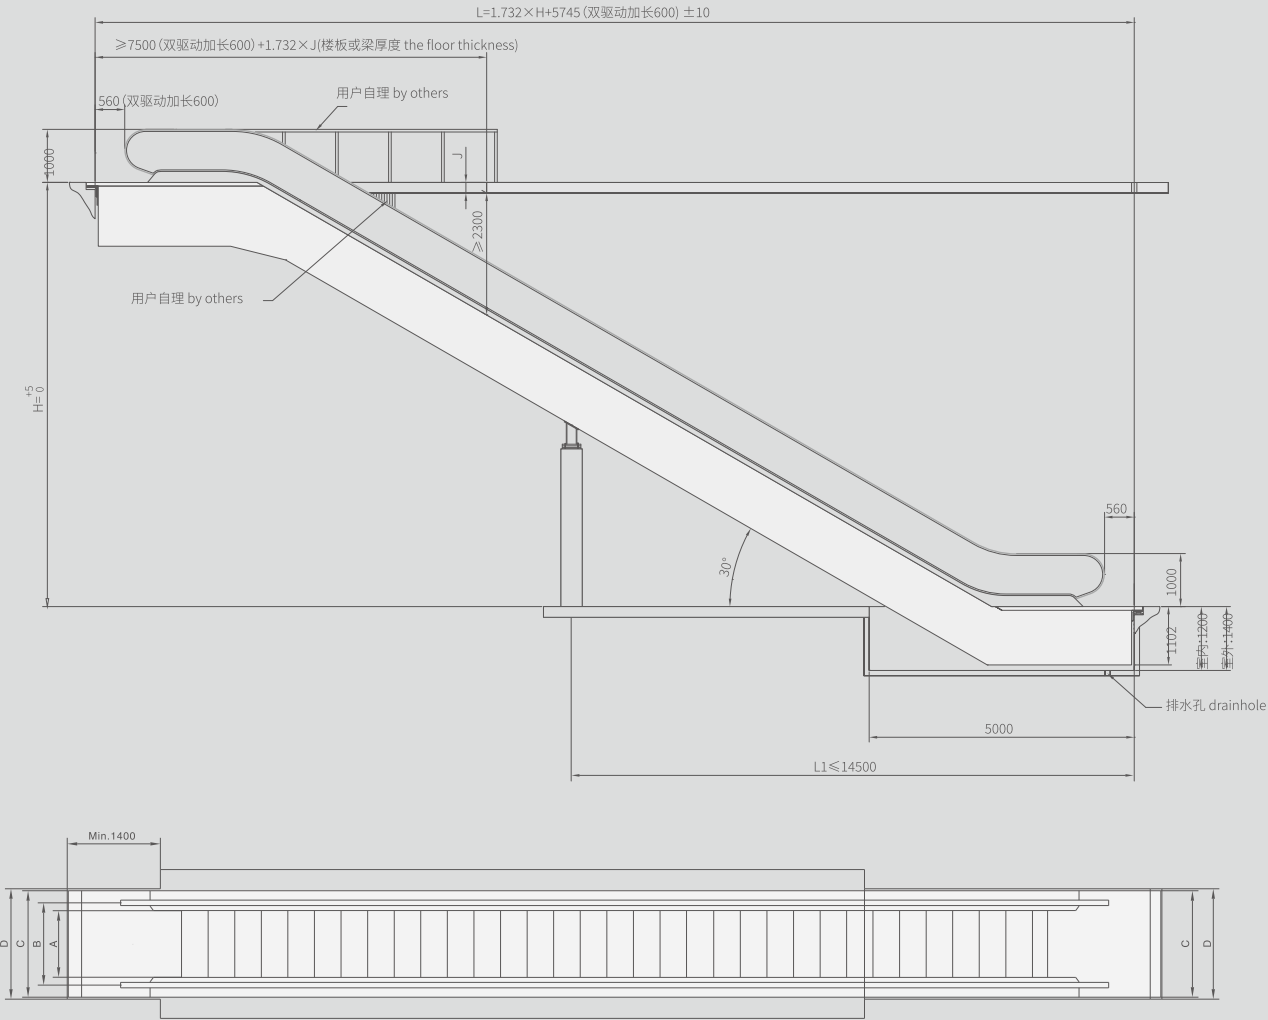

土建示意图仅供参考
The schematic drawing of civil work is for reference only

Business type escalators 商务型 自动扶梯	型号 Model	提升高度H (mm) Traveling height	额定速度 (m/s) Rated speed	最大输送能力 (人/h) Max load capacity	倾斜角 (°) Inclination	水平梯级 (只) Flat step num	驱动主机功率 (KW) Motor power	A(mm)	B(mm)	C(mm)	D(mm)
	EF10 YFMS30-60	1200≤H≤5000	0.5	3600	30°	2	5.5	600	838	1140	1200
		5000<H≤6000					7.5				
	EF10 YFMS30-80	1200≤H≤3500	0.5	4800	30°	2	5.5	800	1038	1340	1400
		3500<H≤5000					7.5				
		5000<H≤6000					11				
		1200≤H≤3000					5.5				
	EF10 YFMS30-100	3000<H≤4500	0.5	6000	30°	2	7.5	1000	1238	1540	1600
		4500<H≤6000					11				
	EF10 YFMS35-60	1200≤H≤5000	0.5	3600	35°	2	5.5	600	838	1140	1200
		5000<H≤6000					7.5				
		1200≤H≤4000	0.5	4800	35°	2	5.5	800	1038	1340	1400
		4000<H≤5000					7.5				
		5000<H≤6000					11				
		1200≤H≤3500	0.5	6000	35°	2	5.5	1000	1238	1540	1600
		3500<H≤4500					7.5				
		4500<H≤6000					11				

注:如若超出以上规格范围, 请与公司销售中心联系
Remark: Please contact with Sales department if it exceeds above specification

Business /
Light duty inclined
balustrade escalator


商务型
轻载斜扶手
自动扶梯

型号 Model	提升高度H (mm) Traveling height	额定速度 (m/s) Rated speed	最大输送能力 (人/h) Max load capacity	倾斜角 (°) Inclination	水平梯级 (只) Flat step num	驱动主机功率 (kW) Motor power	A(mm)	B(mm)	C(mm)	D(mm)
EF10 YFMS30-60	6000<H≤7000	0.5	3600	30	3	7.5	600	838	1140	1200
	7000<H≤10000					11				
EF10 YFML30-60	10000<H≤11000	0.5	3600	30	3	13	600	858	1200	1260
	11000<H≤14000					15				
EF10 YFMS30-80	6000<H≤7000	0.5	4800	30	3	11	800	1038	1340	1400
EF10 YFML30-80	7000<H≤8000	0.5	4800	30	3	13	800	1058	1400	1460
	8000<H≤10000					15				
	10000<H≤14000					2×11				
	10000<H≤11500	0.65	5900	30	3	2×11				
	11500<H≤13500					2×13				
	13500<H≤14000					2×15				
EF10 YFMS30-100	6000<H≤7000	0.5	6000	30	3	13	1000	1238	1540	1600
EF10 YFML30-100	7000<H≤8000	0.5	6000	30	3	15	1000	1258	1600	1660
	8000<H≤11500					2×11				
	11500<H≤14000					2×13				
	10000<H≤11000	0.65	7300	30	3	2×13				
	11000<H≤12000					2×15				
	12000<H≤14000					2×18.5				

注:如若超出以上规格范围, 请与公司销售中心联系
Remark: Please contact with Sales department if it exceeds above specification

Construction Parameters

土建参数

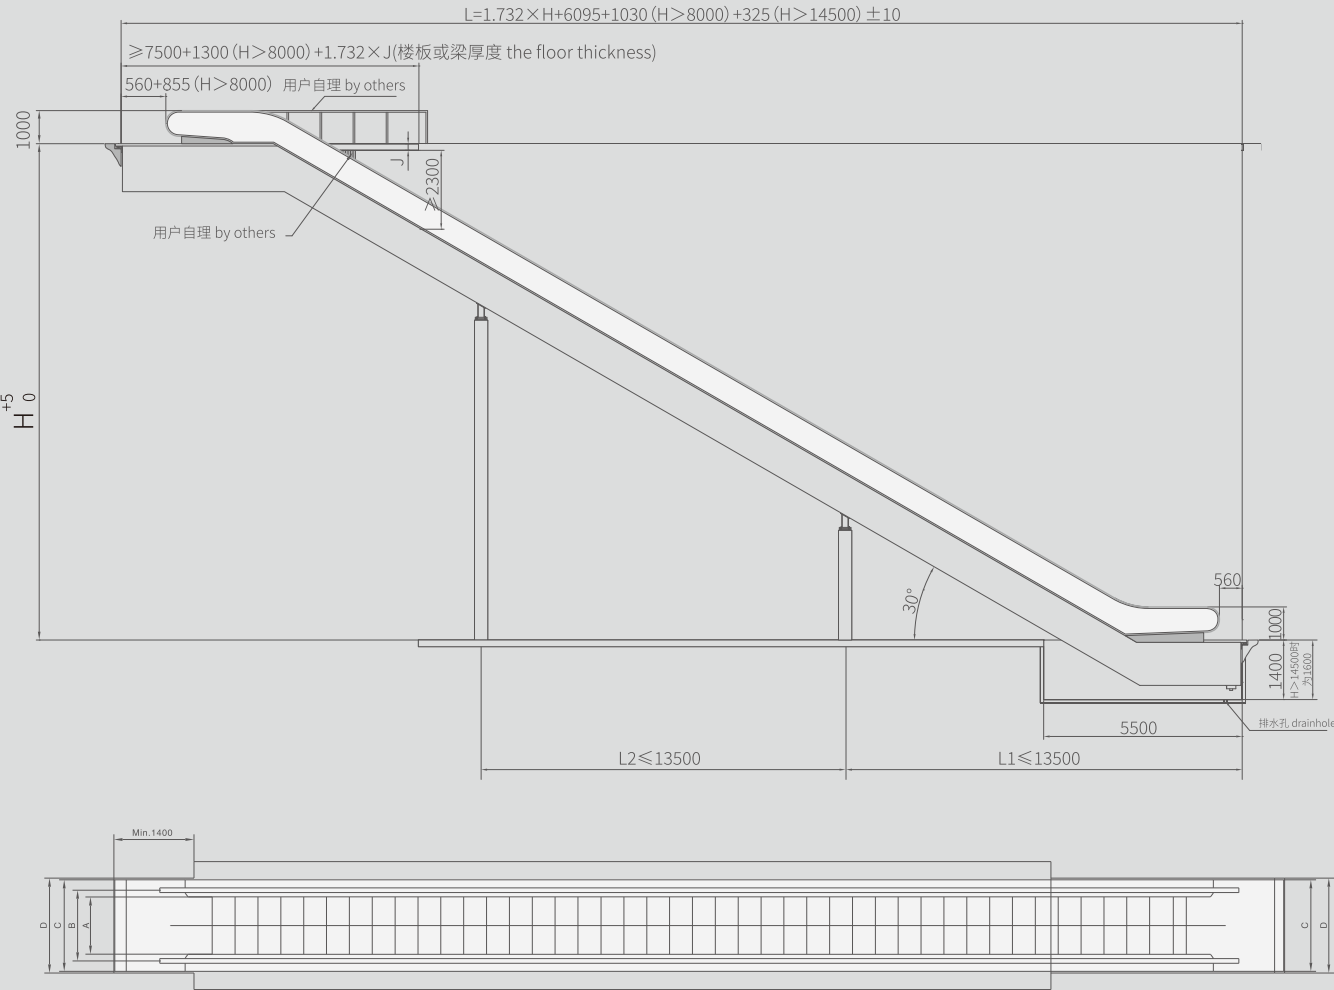

土建示意图仅供参考
The schematic drawing of civil work is for reference only

Public Traffic/
Heavy duty inclined
balustrade escalator



公交型
重载斜扶手
自动扶梯

型号 Model	提升高度 H(mm) Traveling height	额定速度 (m/s) Rated speed	最大输送能力 (人/h) Max load capacity	倾斜角 (°) Inclination	水平梯级 (只) Flat step num	驱动主机功率 (KW) Motor power	A(mm)	B(mm)	C(mm)	D(mm)
EF10 YFXL30-80	3000≤H≤6500	0.5	4800	30	3	11	800	1058	1400	1460
	6500<H≤7500					13				
	7500<H≤9000					15				
	3000≤H≤5000	0.65	5900	30	3	11	800	1058	1400	1460
EF10 YFXL30-100	5000<H≤6000					13				
	6000<H≤7000					15				
	7000<H≤9000					18.5				
EF10 YFXG30-100	3000≤H≤6000	0.5	6000	30	3	11	1000	1258	1600	1660
	6000<H≤7000					13				
	7000<H≤8000					15				
	8000<H≤12000					2×11				
EF10 YFXT30-100	12000<H≤14500	0.65	7300	30	3	2×13	1000	1358	1700	1760
	14500<H≤17000					2×15				
	17000<H≤21000					2×18.5				
	21000<H≤24000					2×22				
EF10 YFXL30-100	3000≤H≤4600	0.65	7300	30	3	11	1000	1258	1600	1660
	4600<H≤5500					13				
	5500<H≤6500					15				
	6500<H≤7500					18.5				
EF10 YFXG30-100	7500<H≤8000	0.65	7300	30	3	22	1000	1358	1700	1760
	8000<H≤9000					2×11				
	9000<H≤10000					2×13				
	10000<H≤12000					2×15				
EF10 YFXT30-100	12000<H≤14500	0.65	7300	30	3	2×18.5	1000	1358	1700	1760
	14500<H≤17000					2×22				
	17000<H≤24000					2×30				

注:如若超出以上规格范围, 请与公司销售中心联系
Remark: Please contact with Sales department if it exceeds above specification

Installation Notice

安装须知

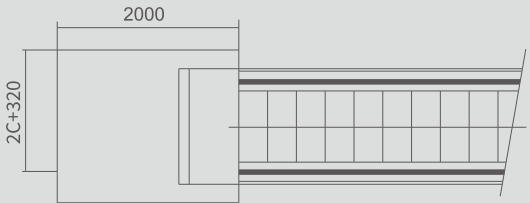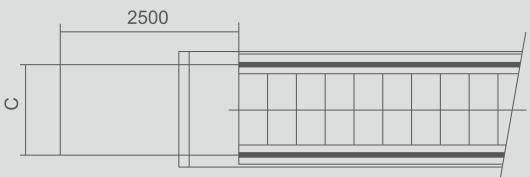

除了确保合同土建的各尺寸和要求，
以下的要求也应达到。


- 为了确保扶梯和人行道的使用安全，自由空间必须在各层站处提供足够大的空间。(参见左最小尺寸图)
- C=扶手宽中心宽度

Besides complying with the drawing of the contract,
attention shoule also be drawn to the following

- To ensure the safety of the escalator and moving walk, free space should be large enough in the landing area. (See the minimum size left)
- C= the distance of the handrails

顶空安全距离


- 在梯阶/踏板的任意点上, 至少有2.3米不受任何障碍的安全距离。
- 特别注意! 如果一台扶梯上的另一台扶梯的提升高度<3.3米, 就不可能达到2.3米的顶空安全距离。

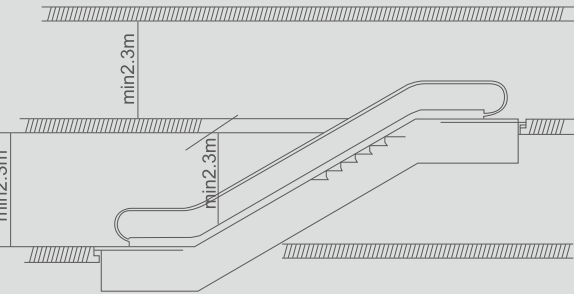

Vertical safety distance

- There should be at least 2.3m upside safety distance starting upward from the step board.
- Notice : if the vertical rise of one escalator, which is installed above another one, is less than 3.3m, the upside safety distance can not reach 2.3m.

扶梯(人行道) 安装必须保证必须的水平安全距离

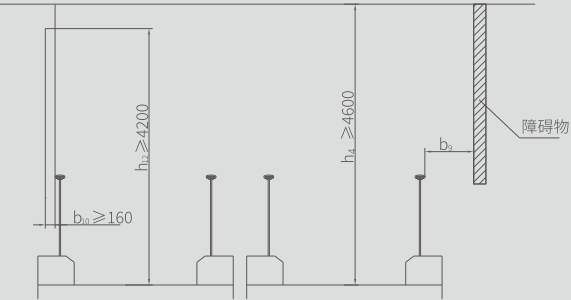

- 扶手带外边缘至墙体或其他障碍物的水平安全距离必须大于80mm。
- 梯级/踏板区上方垂直安全距离必须大于2.3m。
- 扶手带区上方垂直安全距离必须大于2.1m。
- 对楼面开孔或扶梯/人行道交叉布置, 扶手带中心到障碍物的水平安全距离必须大于0.5m。
- 如未达到要求, 需设置专门的防护装置和防撞挡板。
- 专门的防护装置和防撞挡板, 可向怡达快速电梯公司咨询。

Escalators and moving walk horizontal
safety distance

- The horizontal distance between the handrail edge and the wall or other objects should be more than 80mm.
- The vertical distance above the step board should be more than 2.3m.
- The vertical distance above the handrail space should be more than 2.1m.
- In case of floor spaces or the cross layout of escalators and moving walk, the safety distance between the handrail center and the object should be more than 0.5m.
- If the above-mentioned requirments cannot be met, a special protection device and a bumper rail should be used.
- For further informantion, please contact YIDA EXPRESS Elevator.



我们在售前、售中、售后的整个过程全面建立了完善的和高标准的服务体系，对售出的每一台电梯都将实行及时、高效地售后服务及有偿终身维修保养，让您的选择无后顾之忧。

We have established a perfect and high standard service system in the whole process of pre-sale, in sale and after-sale. We will provide timely and efficient after-sale service and paid life-long maintenance for every elevator sold, so that you can choose without worry.

遍布全国的 服务网络

目前，已在全国除西藏以外的所有省份设立服务网点，7*24小时为全国用户提供及时周到的售后服务

大项目 驻点服务

大于50台的项目，维保安排专人驻点服务，并且在该驻点区域设立备品备件库，这样可以全方位服务客户，缩短故障修复时间，提高服务及时性。

设立分支机构 备品备件库

各分支机构都设有常用部件的备品备件库房，可以为客户提供及时的备件更换服务。

Perfect after-sales service
let you have no trouble

完善的售后服务
让您无后顾之忧

北 京

北京市丰台区马家堡东路106号自然新天地写字楼1331室
电话:0572-3062222

广 东

佛山市南海区桂城街道季华东路31号天安中心7栋1410室
电话:0757-86228784

天 津

天津市和平区台儿庄路32号天津利顺德大厦710室
电话:022-23122529

安 徽

安徽省合肥市包河区徽州大道与太湖路交叉口合肥平安国际金融中心办公楼第23层07-08A单元
电话:0551-63890207

重 庆

重庆市渝北区龙溪街道金山路18号1幢24-12、24-13
电话:023-67520916

辽 宁

辽宁省沈阳市和平区和庆街70号联创大厦4楼408室
电话:024-82514801

吉 林

吉林省长春市经开区世纪广场净月大街1号万豪世纪广场A座1613室
电话:0431-80604005

黑龙江

哈尔滨市哈西大街华闻大厦1904室
电话:0451-51523202

福 建

福州市闽侯县上街镇乌龙江中大道7号(A地块)福州高新区海西高新技术产业创新园二期16#楼606单元
电话:0591-83590163

广 西

南宁市良庆区凯旋路16号广西裕达集团南宁五象总部基地广东大厦二十七层2708号
电话:0771-8055052

河 北

石家庄市胜利北大街与石纺路交汇处北辰广场18层8、9号
电话:0311-68055164

河 南

郑州市郑东新区金水东路33号美盛中心写字楼6层604号
电话:0371-86565866

湖 北

湖北省武汉市江汉区青年路房开大厦1603
电话:027-85550132

湖 南

湖南省长沙市天心区南湖路56号顺安大厦2单元2310房
电话:0731-84166338

无 锡

无锡市新吴区金城大厦1-608-609
电话:0510-66813260

江 西

南昌市红谷滩新区九龙大道1177号绿地国际博览城JLH603-D03地块4#商业办公楼1017室
电话:0791-86234389

四 川

四川省成都市青羊区顺城大街308号1栋26层2604号
电话:028-68557303

山 东

济南市历城区七里河路2-9号科技佳苑5号楼601室
电话:0531-82155756

青 岛

青岛市市北区台柳路177号和达中心A座520室
电话:0532-58901733

山 西

山西省太原市春居南路8号居然创客大厦11层11室
电话:0351-5627232

陕 西

陕西省西安市浐灞生态区前海人寿金融中心2号楼10层03室

甘 肃

甘肃省兰州市七里河区西湖街道建工中街68号1单元6层601室
电话:0931-2790277

温 州

温州市鹿城区温州晚报大厦1602室、1603A、1301B室
电话:0577-56619022

云 南

昆明市盘龙区白云路瑞鼎城二期地块四1期B座A1712室
电话:0871-65653575

贵 州

贵州省贵阳市云岩区延安中路世贸广场B区10楼1005号
电话:0851-85867032

南 京

江苏省南京市江宁区金源路6号城际空间站H1-1011室
电话:025-86539626

徐 州

徐州市云龙区和平路99号宝龙广场C号楼1-1112
电话:0516-83569868

内 蒙 古

呼和浩特市新城区东库街鼎盛华世纪广场写字楼8层8004
电话:0471-3975650

新 疆

新疆乌鲁木齐高新区(新市区)北京南路370号银通大厦810室
电话:0991-8790466

浙 江

浙江省湖州市南浔经济开发区联谊西路88号
电话:0572-3638251

上 海

上海市普陀区中江路388弄2号大渡河路388弄3号
电话:021-55220199

Contact Information
of Branch

分公司联系方式